

EV Meter Pay²

A smart level-2 public charging station designed for hotels, shopping centers, parking lots, workplaces, municipalities and more...

This universal charging station is equipped with a built-in card reader that accepts every major payment method including debit and credit cards, digital wallets, QR codes, prepaid, NFC and more. EV Meter's smart, secure and feature-rich solution enables businesses to take initiative and maximize their revenue.



Open Payment System

Accept any type of payment method



24/7 Monitoring

Real-time event notifications and remote software updates



Dual Port

Allow two cars to charge simultaneously and maximize profit



Easy Installation

Quick to deploy in any location




OCPP Supported

Manage the charging station by using EV Meter Core or any other management platform



High-Performance

Maximum 12kW power output per socket

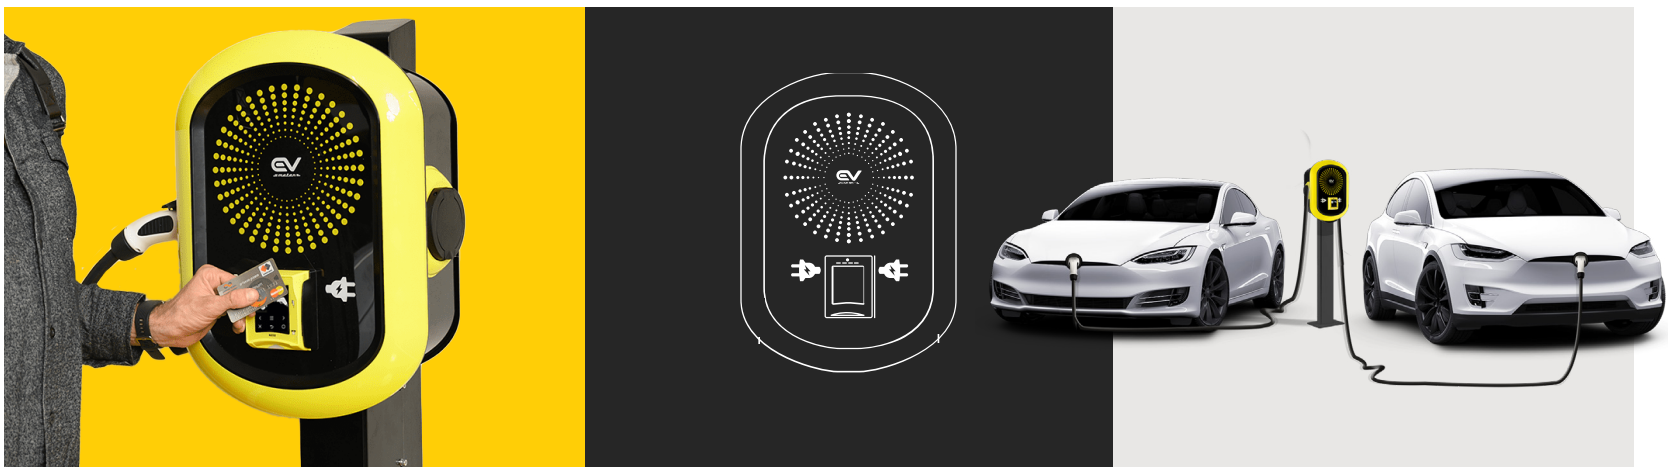

Electrical Data	AC Power Supply	2X (L1 + L2/N + PE)
	AC Input Voltage	110-240 VAC +/- 10%, 50-60Hz
	AC output voltage	110-240 VAC +/- 10%, 50-60Hz
	Maximum Input / Output Current	50A max
	Maximum Input / Output Power	2X 12kW
	Number of Plugs	Two
Communication	Interface Protocol	OCPP 1.6 Supported
	Server Communication	Ethernet, 4G
Supported Payment Schemes	Debit & Credit Cards	Swipe, contact, contactless, EMV chip cards
	Mobile & NFC Payments	
	Prepaid cards & closed environments	
	Static and Dynamic QR codes	
Safety & Protections	Safety Protections	Electronic RCD 30mA AC Electronic 6mA DC Fault current detection
	Power Limit Control	Mode 3 PWM control according to UL-2594
	Type 1 Socket Protection	J-1772 Type 1 connector
	Available Connections	Type 1 Plug, 16.4 ft cable
Enclosure & Environmental Conditions	IP Rating	IP55
	Enclosure protection rating	IK10
	Payment Terminal Impact Protection	IK8
	Enclosure Material	PC + UV
	Operating Temperature	131 °F to 122 °F
	Ambient Temperature Storage	-22 °F to 158 °F
	Status LEDs	Yes
	Light Beacon	RGB color indicator
	Built-in Energy Meter	Yes
Weight & Dimensions (WxHxD)	14.4*20.5*10.5 in, 44 lbs	
Standards & Certifications	ROHS	
	REACH	