



Type 2

Bee Meter Duo

A smart level-2 public charging station designated for hotels, shopping centers, parking lots, workplaces, municipalities and more...

This universal charging station is equipped with a built-in card reader that accepts every major payment method including debit and credit cards, digital wallets, QR codes, prepaid, NFC and more. EV Meter's smart, secure and feature-rich solution enables businesses to take initiative and maximize their revenue.



High-Performance

Maximum 22kW power output



Open Payment System

Accept any type of payment method



24/7 Monitoring

Real-time event notifications and remote software updates



Easy Installation

Quick to deploy in any location





Dual Port

Allow two cars to charge simultaneously and maximize profit



OCPP Supported

Manage the charging station by using HIVE or any other management platform

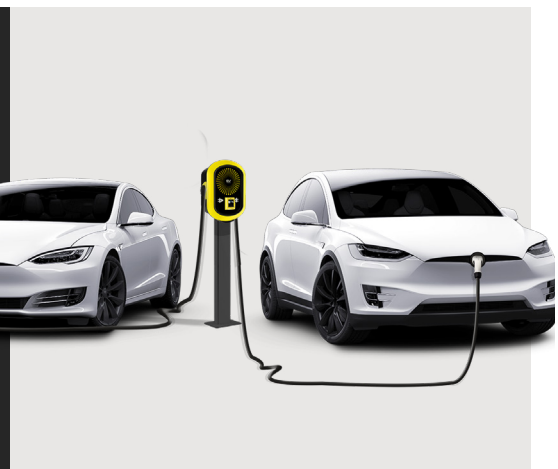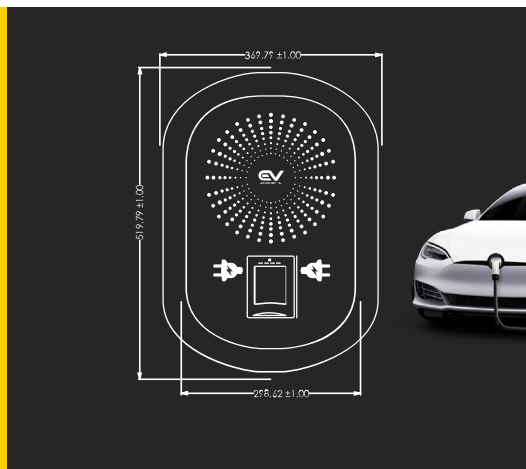

Bee Meter Duo



Electrical Data	AC Power Supply	3P + N + PE
	AC Input Voltage	380-400 VAC +/-10%, 50-60Hz
	AC Output Voltage	Two 380-400 VAC +/-10%, 50-60Hz
	Maximum Input / Output Current	2*(3x32A)
	Maximum Input / Output Power	2X22Kw
	Number of Sockets	Two
Communication	Interface Protocol	OCPP 1.6 Supported
	Server Communication	Ethernet, 4G
Supported Payment Schemes	Debit & Credit Cards	Swipe, contact, contactless, EMV chip cards
	Mobile & NFC Payments	Google Pay, Apple Pay, Swish and more
	Prepaid cards & closed environments Static and Dynamic QR codes	Alipay, WeChat Pay and others
Safety & Protections	Safety Protections	Electronic RCD 30mA AC Electronic 6mA DC Fault current detection
	Power Limit Control	Mode 3 PWM control according to IEC 61851-1
	Type 2 Socket Protection	IEC 62196-1 , IEC 62196-2
	Available Connections	Type 2 Socket or 5m Cable with Plug
Enclosure & Environmental Conditions	IP Rating	IP55
	Enclosure protection rating	IK10
	Payment Terminal Impact Protection	IK6
	Enclosure Material	PC + UV
	Operating Temperature	(-25°C) to (+55°C)
	Ambient Temperature Storage	(-30°C) to (+70°C)
	Status LEDs	Yes
	Light Beacon	RGB color indicator
	Built-in Energy Meter	Yes
Weight & Dimensions (WxHxD)	Socket	365x520x266 mm, 15kg
Standards & Certifications	ROHS	
	REACH	
	CE Compliant	
Optional Devices	Type 2 Socket Protection	Shutter
	Dynamic Load Management	Yes
	Pedestal	Yes